

1969



Model Aircraft Regulations


Governing Sporting Model Aviation in America

Issued under NAA-FAI Franchise

by the Contest Board



PRICE 50¢

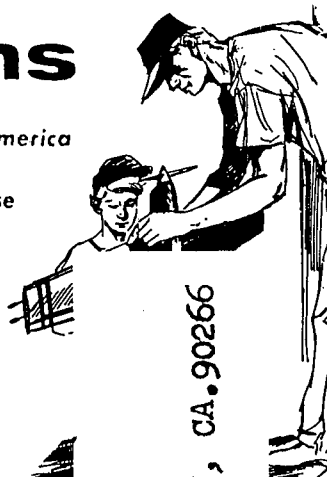


AMA/RENAUD
RESEARCH LIBRARY

RUSS BARRERA
1200 STRAND
MANHATTAN BEACH, CA. 90266

BULK RATE
U. S. POSTAGE
Paid
Wash., D. C.
Permit No. 2374
Non-Profit Org.

ACADEMY OF MODEL AERONAUTICS
1239 VERMONT AVE., N.W., WASHINGTON, D. C. 20005

3944
9



Error: Entry is not within 2 feet of 45° elevation point. Loops are rough or not of equal size. Paths connecting loops are not properly horizontal or vertical according to the maneuver sketch. Bottoms of lower loops are not at 4-6 feet height. Tops of upper loops are

not 3-7 feet below the 90° point over the flyer's head. Loops are not properly tangent to form a square pattern. Model recovers before it has flown vertically through the clover pattern.

21.16 LANDING. A correct landing is judged when the model makes a smooth realistic approach, touches down smoothly with no bounce, and comes to a stop without having touched any part of the model to the ground other than the landing gear. Two or 3-point landings are permissible.

Maximum 40 points. Minimum 0 points.

Errors: An error is scored anytime the model bounces or touches any part of the model to the ground other than the landing gear. Crash, flip-over, belly or upside-down landing receives no score. Any unusual circumstances surrounding the above errors which may cause an error not within the pilot's control will be judged accordingly.

21.16 NOTE. Illustrations are for counterclockwise flight and are reversed for clockwise flying.

PRECISION AEROBATIC SCORE SHEET

Name: _____ Contestant or AMA No. _____

	POOR	FAIR	GOOD	EXCELLENT	SCORE
Workmanship -----	4	6	8	10	8
Realism -----	4	6	8	10	8
Finish -----	4	6	8	10	9
Originality -----	4	6	8	10	10
Starting (within 1 Min.) -----	10	20	30	40	32
Take-off -----	10	20	30	40	35
Reverse Wing Overs -----	10	20	30	40	40
Inside Loops (3) -----	10	20	30	40	28
Inverted Flight (2 laps) -----	10	20	30	40	32
Outside Loops (3) -----	10	20	30	40	30
Inside Square Loops (2) -----	10	20	30	40	35
Outside Square Loops (2) -----	10	20	30	40	22
Triangular Loops (2) -----	10	20	30	40	40
Horizontal Eights (2) -----	10	20	30	40	38
Horizontal Square Eights (2) -----	10	20	30	40	35
Vertical Eights (2) -----	10	20	30	40	25
Hourglass Figure -----	10	20	30	40	32
Overhead Eights (2) -----	10	20	30	40	28
Four-leaf Clover -----	0	10	20	30	25
Landing -----	0	10	20	30	25
Flight Pattern -----	0	10	20	30	25
TOTAL					542

Model clubs across the nation are chartered by AMA. These clubs are eligible for special insurance and other AMA benefits. In many areas, model flying sites are provided by civil government, military or business co-operation, with participation requiring club membership as proof of responsibility.

**REQUEST
CHARTER
FORMS &
DETAILS
FROM HQ**

22. RADIO CONTROL PATTERN EVENT REGULATIONS

22.1 OBJECTIVE: To control by radio a model airplane so that various planned maneuvers may be accomplished. The criterion is the quality of performance, not the mechanism of control. R/C performance shall be based on the excellence of maneuvering the model's maneuvers compared to similar maneuvers performed by a full size plane. Maneuvers shall be judged according to the AMA Radio Control Judges Guide.

22.2 MODEL AIRCRAFT REQUIREMENTS:

22.2.1 Model shall be of the reciprocating internal combustion engine powered type. No model may weigh more than 15 lbs. gross weight, ready for takeoff. Total displacement of engine(s) shall not exceed 6102 cubic inches (10 cc).

22.2.2 There shall be no radio equipment or aircraft control function limitations in any pattern class. (Radio equipment is only limited by FCC regulations as specified below).

22.2.3 Two airplanes may be entered by a contestant and are to be numbered "1" and "2". The contestant may choose to enter either plane at the beginning of the meet and shall continue to use such plane unless, and until, said plane shall be damaged to the extent that it cannot be readily repaired. Contestant then may, upon notifying the Contest Director, substitute the second plane for the balance of the meet without penalty. Once this has been done, the contestant may not re-submit the first plane later in the same contest.

Substitution of basic components, or the two entered aircraft, i.e., wing(s), fuselage, or tail surfaces, will be considered the same as switching airplanes, and therefore, will only be allowed one time. In this connection, each basic detachable component of each aircraft must be marked as "1" and "2". Substitution rule does not apply to radio and engine.

22.2.4 The Builder of The Model rule will only apply to those R/C events in which points for appearance and workmanship are a factor. By this definition the rule does not apply to any of the pattern events.

22.2.5 All models entered in radio control competition shall be identified by the contestant's AMA license number permanently affixed to the upper side of the right-hand lifting surface or to each side of the fuselage or vertical stabilizer. Unless otherwise stated, height of the numerals must be at least one inch. Both stroke and width shall be such to enable ready recognition. It is suggested that the letter N be placed in front of the license number when the number is affixed to the side of the fuselage or vertical stabilizer.

22.3 SAFETY REQUIREMENTS: Considerations of safety for spectators, contest personnel, and other contestants are of the utmost importance in this event, and the following safety provisions must be observed.

22.3.1 All models must pass a general safety inspection by the Event Director or his representatives before they are allowed to compete.

22.3.2 If any part of a maneuver is performed over a controlled spectator area, the contestant shall receive a zero score for that maneuver. Continued flying over controlled spectator areas by any one contestant shall result in disqualification of the event, and the following safety provisions must be observed.

22.3.3 Dangerous flying of any sort, or poor sportsmanship of any kind, shall be grounds for disqualification of the contestant involved.

22.3.4 All planes entered must have rounded prop spinners, or some sort of safety cover on end of propeller shaft (such as a rounded "acorn nut"). Radius of point shall not be less than 1/8 inch.

22.4 LICENSING REQUIREMENTS: All radio equipment and operation must conform to the regulations of the F.C.C. AMA membership card and every sanctioned meet.

22.5 GENERAL EVENT REGULATIONS: The R/C Pattern Event shall be divided into three classes based on degree of difficulty of maneuvers involved.

22.5.1 The three classes, in order of increasing difficulty, are Class A, Class B, and Class C.

22.5.2 In Class C only, there shall be a sub-division into Novice and Expert. (The methods of determining and controlling the Novice/Expert division are explained elsewhere).

22.5.3 The Contest Director and/or the Sponsors of a sanctioned meet shall determine which of the classes will be flown, and such information must accompany all advanced notices pertaining to the contest. Competitors must also be advised prior to start of contest of any planned deviations from standard AMA rules pertaining to the events they have entered.

22.6 CONTESTANT CLASSIFICATION:

22.6.1 Except as noted below, a contestant may enter any one pattern class at his own option. Once committed to a certain class, he will be allowed to move only to a higher skilled class in subsequent contests for the remainder of that particular year. However, if a flier completes a calendar year of competition without winning a single contest event in the class he is committed to, he may if he so chooses, start the new calendar year in the next lower skill class. This does not apply to a flier who has reached his class by winning three contests in the next lower skill class.

22.6.2 Contestants shall advance through the classes as follows: After placing first in three sanctioned contests, which he must fly in his chosen class, he will be automatically advanced to the next higher class, i.e., from Class A to Class B, from Class B to Class C, Novice, or from Class C, Novice to Class C, Expert.

22.6.3 The Contest Director of each AMA sanctioned R/C meet having Class A, B, C/N, or C/E events is responsible for upkeep of the classification system. He must require that only current AMA members be allowed to fly in the meet and that they all have valid FCC licenses. As soon as the first place winners in each class are determined, the Contest Director shall fill out the appropriate spaces on the back of their membership cards, indicating the date, and the class won. He will also affix his verifying signature.

22.7 NUMBER OF FLIGHTS: There shall be no limit on the number of flights (other than that imposed by time available). Contest officials shall make every reasonable effort to insure that all contestants receive equal opportunity to fly.

22.8 OFFICIAL FLIGHT: A flight is considered official if two maneuvers, other than takeoff and landing, have been judged. An attempted maneuver yielding zero points is still considered "judged."

22.9 TIME LIMITS:

22.9.1 A class A contestant is allotted a total of eight (8) minutes.

22.9.2 A class B contestant is allotted a total of ten (10) minutes.

22.9.3 A class C contestant (Novice or Expert) is allowed a total of eleven (11) minutes.















22.9.4 In all classes the contestant must get his engine started and commence his flight within the first two minutes after his time has been started. When he fails to commence within the first two minutes, and is so informed by the timer, he must immediately clear the area for the next contestant. No engine restarts are allowed after the wheels leave the ground on takeoff. Restarting is permitted within the first two minutes, but only if prior to takeoff.

22.10 POINT SYSTEM: A point system shall be used to score maneuvers. Each maneuver shall be judged on a scale of zero to ten.

22.11 DETERMINING THE WINNER: The highest score for the total of the two best flights shall be the winner. Maneuver points from repeat flights may not be added to earlier flights. Each flight is complete in itself. In case of tie, the third best flight scores of the contestants concerned shall be used to determine the higher place (if only two


AMA Radio Control Maneuvers

PRECISION PART OF PATTERN

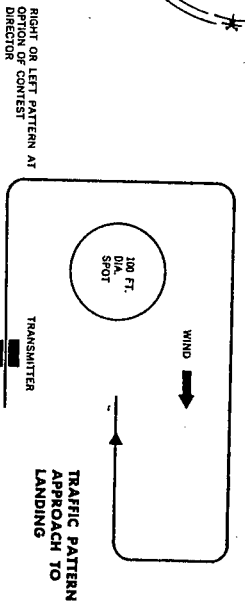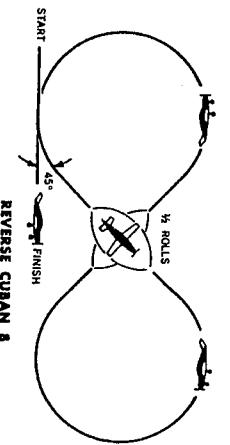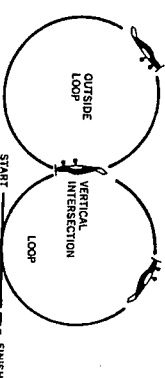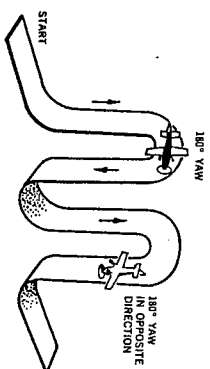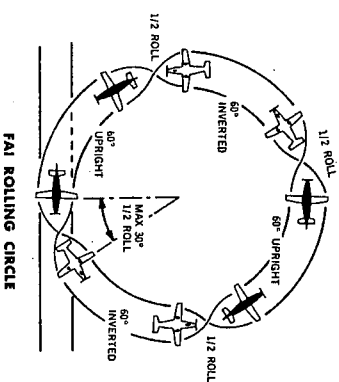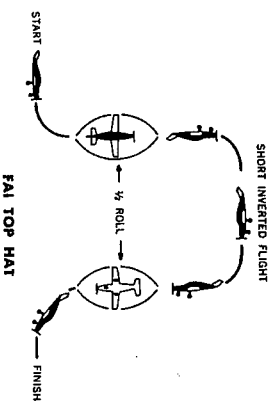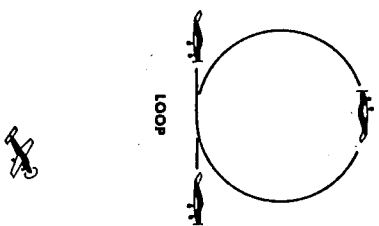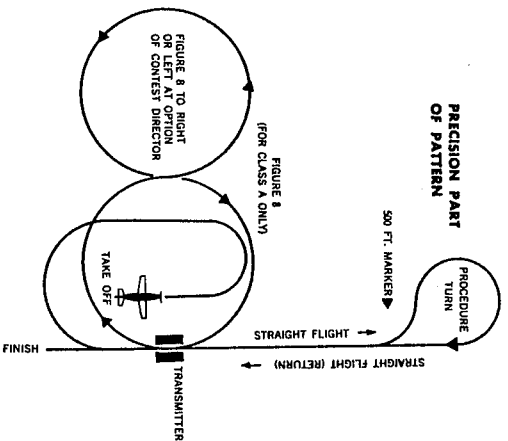

Maneuver Drawings Courtesy of MODEL AIRPLANE NEWS

THANK YOU!

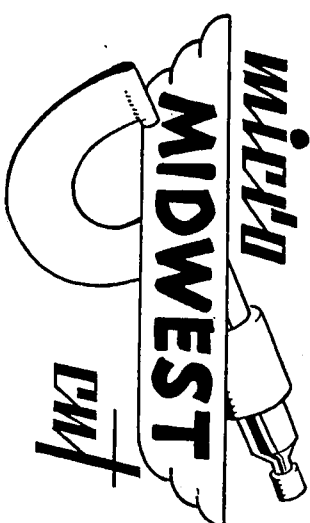


CONTEST GRADE BALSA WOOD

Thank you Mr. Model Builder! For years we have been telling you Micro Cut Balsa is best, but now we don't have to tell you any more. Instead you are telling us!


You are telling us how well you like the even grain, the texture, the satin smooth finish, the sizes cut to micrometer standards, and you like the way we skin wrap our balsa so that it always stays fresh.

We did not reach this success overnight. It took years of research and development in cutting and sanding methods in order to produce a product that would meet our exacting standards. All of our machines were built and perfected by us in our own shop.


Micro Cut Balsa is not just sawn, it is PRECISION MACHINED! Try our balsa and see for yourself why Midwest Micro Cut is the balsa demanded by modelers all over the world.

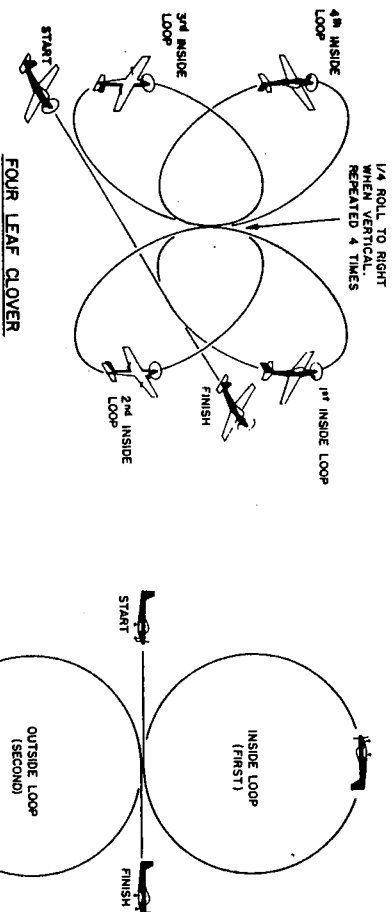


FOUR LEAF CLOVER

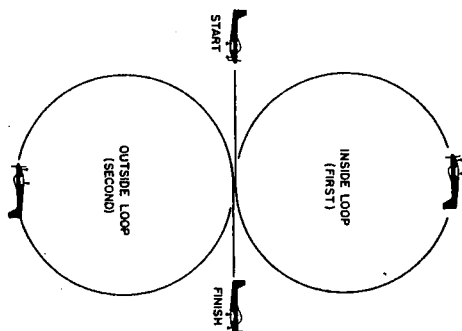


FAI VERTICAL 8

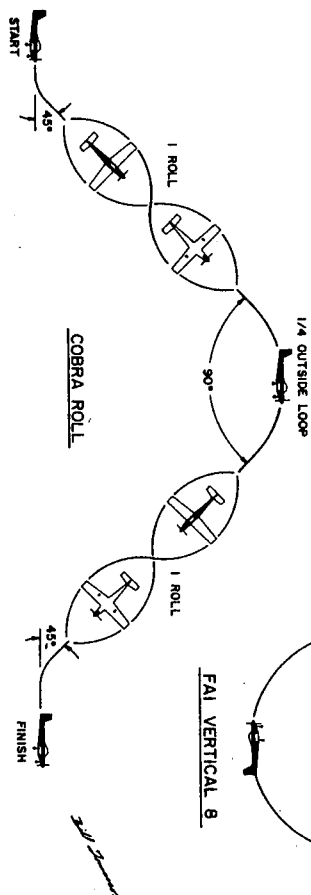


COBRA ROLL

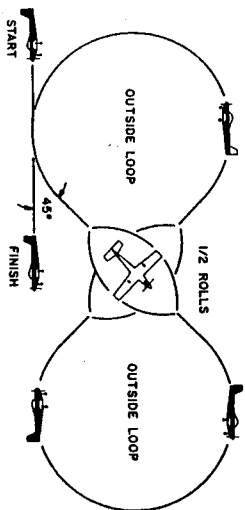


INVERTED REVERSE CUBAN 8



180 DEGREE TURN

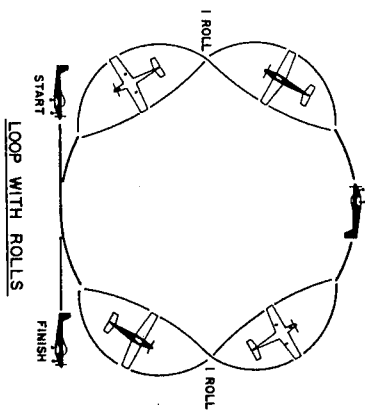

LOOP WITH ROLLS

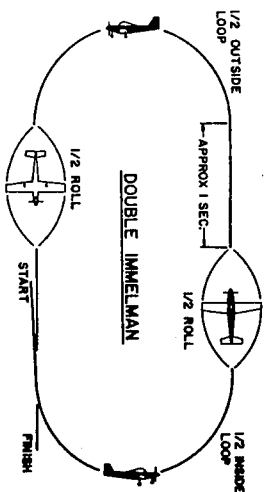

DOUBLE IMMELMAN

flights have been scored during the normal contest time the highest single flight score of the contestants concerned shall determine the higher place). There is no minimum number of flights which must be scored.

22.12 FLIGHT PATTERN: The contestant must fly his entire flight according to the established Flight Pattern for his particular class and in the sequence listed. Maneuvers performed out of order will not be judged.

22.12.1 The contestant must call out each maneuver before he attempts to perform it. Call out should be made just prior to execution. Also the flier should use the straight flight time at the end of each maneuver to announce, "maneuver complete."

22.13 CLASS A PATTERN:

The maneuvers are as follows:

1. Takeoff
2. Straight Flight Out
3. Procedure Turn
4. Straight Flight Back
5. Figure Eight
6. Three Rolls
7. Immelman
8. Three Inside Loops
9. Stall Turn
10. Traffic Pattern Approach
11. Landing Perfection
12. Spot Landing

*Rolls may be Axial or Barrel. Judges are to assume Axial if Barrel is not specified.

22.14 CLASS B PATTERN:

The maneuvers are as follows:

1. Takeoff
2. Straight Flight Out
3. Procedure Turn
4. Straight Flight Back
5. Touch and Go
6. Three Axial Rolls
7. Three Inside Loops
8. Three Turn Spin
9. FAI Rolling Circle
10. FAI Horizontal Eight
11. Three Outside Loops
12. Slow Roll
13. Reverse Cuban Eight
14. Traffic Pattern Approach
15. Landing Perfection
16. Spot Landing

22.15 CLASS C PATTERN (NOVICE AND EXETER):

The maneuvers are as follows:

1. Takeoff
2. Straight Flight Out
3. Procedure Turn
4. Straight Flight Back
5. Touch and Go
6. Three Axial Rolls
7. Three Inside Loops

Ten (10) of the maneuvers 8 through 27 shall be selected by the Contest Director just prior to the start of the day's flying. They shall be chosen in a random manner and in full view of the contestants (such as pulling from a hat). The maneuvers shall be flown in the order listed, except for those not chosen. In a contest of more than one day duration, a new list of maneuvers should be selected at the beginning of each day's flying.

8. Four Point Roll
9. Knife Edge Flight
10. Reverse Spin
11. FAI Top Hat
12. FAI Rolling Circle
13. FAI Double Stall Turn
14. FAI Horizontal Eight
15. FAI Vertical Eight
16. FAI Double Immelman
17. Three Outside Loops
18. Inverted Spin
19. Slow Roll
20. Tail Slide
21. Reverse Cuban Eight
22. Cobra Roll
23. Four Leaf Clover

24. Loop with 1/2 Snap
25. Inverted Reverse Cuban Eight
26. 180 Degree Turn
27. Loop with Rolls

The remaining three maneuvers are mandatory:

28. Traffic Pattern Approach
29. Landing Perfection
30. Spot Landing

A complete Class C Flight consists of 20 maneuvers, 10 constant and 10 variable.

22.16 DESCRIPTION OF MANEUVERS: A detailed description of each maneuver specified in the above patterns will be found in the AMA Radio Control Judges Guide.

22.17 SUGGESTED FIELD PROCEDURE: The procedures listed below are suggestions to Contest Directors for operation of an R/C Pattern event, and may be altered to fit local conditions.

22.17.1 All R/C contestants shall be set up in "pits" at spot assigned by Event Director, so they will be under his immediate control.

22.17.2 There will be no testing of transmitters or receivers during the flying period. Transmitters may be impounded at discretion of Event Director. Any person causing interference will suffer immediate disqualification. The Event Director will provide a monitor receiver to check for interference.

22.17.3 The flight order shall be determined by position of contestants' signatures on a single flight list held by Event Director or his representative. This list shall include all classes and frequencies. Contestant shall have his name on list only once at any one time; names may be moved to bottom of list on request, but trading of positions with other contestants is not allowed. When a contestant is finished on a flight, he shall sign the flight list and carry over from day to day.

22.17.4 Event Director shall carry out following procedure:

- a. Numbers 1, 2, and 3 on Flight List shall be on flight line with their models, equipment, and one helper if desired. No 1 is contestant flying or ready to fly. No 2 is next man to fly, etc.

b. The No. 1 man shall have 3 minutes from completion of preceding flight in which to release model for the start of his flight. False starts are permitted, but flight within this limit; contestant must immediately remove his plane and equipment to the pits. It shall be representative of Event Director or his representative to notify contestant of start and end of 3-minute period.

c. Numbers 4, 5, and 6 on the Flight List shall have their planes and equipment in a ready box located near the flight line. As soon as a flight is completed, the No. 4 man becomes No. 3 and shall be requested to move his model and equipment onto the flight line. If he is not on hand to do so, he shall be dropped from the Flight List, and the last advanced to fill his place. The Event Director or his representative shall be responsible for notifying contestants when they are to move to ready box or flight line.

22.17.5 When technically possible and when judges and space are available, it is strongly recommended that two or more flights be flown simultaneously, under the following conditions:

- a. Separately located cross wind and landing areas sufficient to absorb engine noise and flight path interference.
- b. Contestants flying simultaneously shall carefully check receiver and transmitter operation before take-off, to be sure no interference between them is possible.
- c. Contestants flying simultaneously must be no more than three positions apart on the Flight List. Event Director or representative shall, where possible, select contestants at top of Flight List so that contestants flying on compatible frequencies are on flight line together.
- d. Should a contestant oppose flying simultaneously with someone else, he may cancel his turn, and re-sign at the bottom of the Flight List.

22.17.6 OFFICIALS. An Event Director, a Dispatcher-Recorder, and Judges are the essential officials for an R/C event. If possible, the Dispatcher-Recorder should have at least two helpers.

22.17.7 Each flight should be judged by at least two judges, with their scores averaged to give final

AMA RADIO CONTROL JUDGES GUIDE

A. PURPOSE: The purpose of the AMA R/C Judges Guide is to furnish an accurate description of each maneuver listed in the three Pattern Event classes, and to provide a reference for use in developing a uniformly high standard of judging in all AMA sanctioned contests.

Study of this guide by the competitor will help him learn exactly what is expected, while study by the judges will help them decide precisely how well the competitor comes up to these expectations.

B. PRINCIPLES: The principles of judging an R/C model should be based on the perfection with which the model simulates full scale aircraft performance. The main criteria for perfection in an individual maneuver can be classified as follows:

1. Precision of the maneuver
 2. Positioning or display of the maneuver
 3. Size or dimensions of the maneuver
 4. Smoothness or gracefulness of the maneuver.
- All of these requirements must be met in order for a maneuver to be rated perfect. They are discussed below.

a. PRECISION: At the instant the contestant announces his next maneuver, the judge should form an image of the course the airplane should follow during the performance of the maneuver. The precision of the maneuver will then be based on how well the model tracks through this imaginary course.

Competitors will read this statement and exclaim "How am I to know what the judge imagines is a perfect course?" The answer to this is that once the model has locked in on the straight and level entry portion of a maneuver the only real disparity that can exist between the judge's and the competitor's image is the size of the maneuver. The judge will have some preconceived ideas about optimum size as discussed in a later section. However, the judge should modify his image if the first portion of the maneuver clearly demonstrates that the contestant intends to do a maneuver of much smaller or larger dimensions than the judge first imagined.

It will be noted that forming an image of the forthcoming maneuver is based on using the straight and level entry as a reference. If the contestant fails to go through this portion of the maneuver, it will be difficult and perhaps impossible to form an image before the start of the maneuver. The absence of a definite entry into a maneuver therefore increases the difficulty of judging its precision and competitors will recognize this as justification for downgrading.

The straight and level exit from a maneuver is one of the more valuable portions of the maneuver in evaluating how well the intended course of the maneuver was followed. The well-poised pilot will use it to announce "maneuver completed," while the less competent pilot will often slip it in hopes that the judge will not notice the deviation with respect to his entry heading. The absence of a well defined straight and level exit therefore should also result in downgrading.

b. POSITIONING: To achieve perfection, the competitor must position his maneuvers in a way that they can be easily judged. The first consideration on position is longitudinal distance from the competitor. It goes without saying that the judges should be located near the competitor so that they obtain identical views of the maneuver. The competitor should center his aerobatic maneuvers at an average distance of less than 300 feet from himself.

In short, the judge should be unmerciful if he gets the impression that the competitor is trying to hide his display by flying at a great distance. Positioning of maneuvers involves more than mere distance. They should also be presented in a relative direction which displays the most difficult aspects of

score for the flight. It is suggested that each maneuver be scored immediately after it is performed. Judges shall score maneuvers individually and without consultation between them. There should be enough judges available to establish a rotational procedure which will average out variations in judging.

the maneuver. Specifically, maneuvers which have circular symmetry (such as loops, Immelmans, Cuban Eights, and FAI Horizontal Eights) should have the "holes" in their circular path clearly visible, preferably in a plane exactly perpendicular to the line of sight to the model. The same applies to the Square Eight.

The diagrams used to describe these circular maneuvers in the official rule book define the best view to present to the judge. "End on" or "cant'd" presentation of these should result in downgrading since it increases the difficulty of judging the symmetry of figure 8's and the "tracking" of consecutive loops.

While no special bonus is justified for exceptionally low altitude, excessively high altitude is cause for downgrading. Most maneuvers can be done at less than 300 feet longitudinal distance with altitudes that would not force the judge to look up at more than about a 45 degree angle. If maneuvers are done at high altitudes and close to or above the transmitter in a way that they force the judge to look up vertically or near vertically, they should be downgraded. The main reason for this is that most maneuvers cannot possibly be properly oriented when performed directly overhead. However, a comment to competitors is in order here. This downgrading is almost an automatic reaction after a judge has been on the runway a few hours. He usually has a tired neck from looking at some maneuvers which must be followed overhead, and he is prone to be severe if he is forced to look there unnecessarily.

By the same token, most judges will refuse to even look at the remainder of a maneuver after an aircraft crosses the sun unnecessarily. There are also some places where the sun often cannot be avoided and the judge should follow through to the best of his ability. But he is completely justified in scoring zero if in his opinion the maneuver could have been placed elsewhere.

c. SIZE OF MANEUVERS: In the previous section it was pointed out that most maneuvers could be safely done at an average distance no greater than 300 feet from the competitor and judges, and at altitudes such that the line of sight to the model will seldom exceed a 45° elevation angle. These criteria place an upper limit of about 350 feet for the total vertical size of a maneuver. Most competitors and judges will recognize this as more than ample. It should also be recognized that 300 feet of horizontal distance is a maximum value and not really the optimum. For example an inside loop of 100 feet diameter at 100 feet longitudinal distance would stay within the 45° angle and a safe altitude and would be more clearly visible to the judge than at 800 feet distance. The competitor who performs loops in the 200 ft. region is therefore allowing the judge to evaluate them more critically and he should suffer no downgrading for positioning. On the other hand, a 100 ft. diameter loop at 300 ft. distance might be downgraded.

The optimum size of maneuvers is related to some extent on the size and normal flying speed of the model. For example, loops of 20 to 30 feet diameter done by a 2 ft. wing span airplane would not necessarily look poor or out of scale. However, 20 or 30 ft. diameter loops by a 50 mph model would give the impression that an imaginary pilot in full scale simulation would be downright uncomfortable if not "blacked out" due to the high "g" forces. Exceedingly small or tight maneuvers with unnecessarily high rates of roll, pitch or yaw do not simulate full scale performance and they should be downgraded accordingly.

d. SMOOTHNESS AND GRACEFULNESS: These two factors are in-eer-related with size of the maneuver and therefore again are related to normal flying speed of the model. Various judges and competitors will have different opinions of what actually constitutes smoothness and gracefulness. The most general definition must again be related to full scale stimulation and the

effects of the maneuver on an imaginary pilot or passenger in the plane. On a touch-and-go or landing, for example, the judge might imagine the airplane as a DC-8 in the judge's mind. Many of the so-called "average" landings by RC models, in this equivalent gear and speed, would result in shearing off of the landing gear and a total loss of the airline company's profits and equipment!

It is recognized that few RC judges have ever been passengers in full scale aerobically airplanes and therefore have no actual experience with the "g" forces in aerobically maneuvers. Two to three g's would not be excessive in such performance, particularly in violent maneuvers such as a snap roll or spin. However, by comparison, a 30 ft. diameter loop at 50 mph results in about 10 g's, which is close to or excess of the design limits of most full scale aerobically aircraft. Clearly, such light maneuvers are not scale-like.

The matter of smoothness is basically related to scale like appearance. For example, a perfect set of consecutive rolls should have a constant roll rate from start to finish. A perfect loop must have a constant radius defining a perfect circle. It cannot be made up of a series of straight flight increments with sudden angular jerks placed between. Such sudden jerks represent high "g" forces well in excess of full scale tolerances and maneuvers should be downgraded for this.

C. ACCURATE AND CONSISTENT JUDGING: The most important aspect of consistent judging is for each judge to establish his standards and then maintain that standard throughout the meet. It is advisable for the contest director or chief judge to hold a briefing prior to the start of the meet in order to make the standards as uniform as possible. This is done best by means of a practice flight which all judges score simultaneously and privately. After the flight, the defects in each maneuver should be discussed by all judges and a semblance of agreement reached about the severity of defects. Once this is done, however, and the contest is started, the individual judge should not alter his standards under any influence.

The contest director should clearly define areas in which it is considered unsafe for competitors to perform, such as above spectators or over buildings, etc. It is highly recommended that the judges agree to register zero points for maneuvers done in these areas. Furthermore, for consistency, judges should exchange a quick note of agreement to issue zeros immediately following an "over the crowd" maneuver. Nothing can cause more unrest among contestants than a zero and seven score of the same maneuver!

The responsibility for disqualifying pilots who persist in flying unsafely should be assigned to the judges by the C.D. The definition of unsafe areas should be absolutely unambiguous. For example, it should be stated that "maneuvers performed over the spectator area will be scored zero" and not that "maneuvers can be performed over the spectators at a safe altitude". Obeying such safety regulations is just one more of the many pressures associated with winning a competition and the man who overcomes all pressures is more expert than one who does not.

D. JUDGING INDIVIDUAL MANEUVERS: The schedule of maneuvers to be performed is described in Section 22 of the AMA Rule Book. Each maneuver is to be judged individually on a basis of 0 to 10 points according to the degree of excellence.

A common problem in judging is to score the first flight too high and then find there is no margin left to reward a superb flight. When in doubt give the lower score. Remember that perfection is not a relative thing. Perfection is that maneuver in which you see absolutely no flaws. It is not a common occurrence.

In the following section, a description of each maneuver is given and then a number of reasons for downgrading are listed. The maneuver should be downgraded according to (1) the number of defects observed; (2) the severity of the individual defects; and (3) the number of times any one defect occurs.

For example, a small single change in heading during the taxi portion of the touch and go would be considered one defect while two or three distinct turns would be considered two or three defects. It will be noted that

for many maneuvers there are more than ten possible kinds of defects and that some of these can be repetitive. It will not be possible to downgrade one point for each defect or indeed we would have many negative scores. A score of 10 should be given only if the maneuver is well positioned and no defects are observed. One or two minor defects should result in downgrading to at least an 8 while one severe defect should put it down to 6 as should a combination of three or four minor defects. Any demerit in poor positioning should be decided at the start of the maneuver and also fed into the final score for the maneuver.

E. DESCRIPTION OF MANEUVERS:

Note: Precision ground handling of "Proto Taxi" maneuvers at the beginning and end of each flight is not required. However, in the interest of safety and conserving realism, a certain amount of ground control is considered desirable.

In order to discourage the use of competition aircraft without positive means of directional control on the ground, a taxi demonstration is now required as part of the takeoff maneuver. The taxi demonstration will not be scored on quality. However, if it is not performed, the takeoff maneuver will be automatically lose five (5) points. In other words, if a contestant fails to perform the taxi demonstration and then makes a takeoff worth 5 points or less, his takeoff score will be zero.

TAXI DEMONSTRATION: Prior to takeoff, the plane must be taxied from the Starting Box a distance of approximately 10 feet, including a controlled turn of at least 90 degrees and come to a complete stop. If there are strong winds the CD may allow substitution of an "S" turn, which will serve to demonstrate ground control while avoiding the unnecessary risk of upsetting the model. A flyer not performing this demonstration will automatically lose five (5) takeoff points.

TAKEOFF: The model must start from a standstill following the taxi demonstration. Model shall accelerate gradually and the takeoff lift off gently and climb at a planned angle, continuing in its straight flight path until at least six feet off the ground. Takeoff is completed when model is turned to circle back over the pilot. The takeoff should be downgraded for the following reasons (in addition to loss of 5 points for no taxi demonstration):

1. Pushing or assisting the model when released.
2. Changes in heading during the take-off run.
3. "Jumping" from the ground.
4. Rebounding the ground after becoming airborne.
5. Too steep a climb angle.
6. Galloping in pitch, roll or yaw during climb.
7. Changes in heading during climb.
8. Drooping a wingtip.
9. Starting turn before reaching six foot altitude.

STRAIGHT FLIGHT (U/T): The model must be brought exactly over the transmitter and flown in an absolutely straight path into the wind for a distance of approximately 300 feet before starting the Procedure Turn. (Distance does not have to be accurate, however judges may specify start of turn if they wish). Straight flight may be downgraded because:

1. Does not fly over transmitter.
2. Plane deviates left or right.
3. Does not hold constant altitude.
4. Turns before permission is given by judge.
5. Gallops in elevation.

PROCEDURE TURN: After the straight flight, the model must turn exactly 90° to the left, then exactly 270° to the right and cross over the point where the first turn commenced. The turn may be downgraded because:

1. Left turn not 90°.
2. Right turn to 270°.
3. Changes in altitude during turn.

4. Turns not smooth and circular.
5. Does not head back over exact outgoing path.

STRAIGHT FLIGHT BACK: The model should fly back toward the transmitter along the same line as the outgoing path and pass exactly over the transmitter. The Straight Flight Back may be downgraded because:

1. Turns or wiggles during straight flight.
2. Changes in altitude.
3. Gallops in pitch, yaw or roll.
4. Flight not along original path.
5. Does not pass over transmitter.

FIGURE EIGHT (Class A only): Directly after the Straight Flight Back and at the instant the plane crosses over the transmitter, the model starts into a horizontal, upright figure 8. The figure shall be perpendicular to the straight flight, and flown away from the spectators, i.e. the base of the 8 is over the transmitter and the first turn is made to left or right, depending on spectator location. Crossover of the 8 shall be on the perpendicular line and about 100 feet away from transmitter. Maneuver is finished on same heading as its entry. The Figure Eight should be downgraded for the following:

1. Entry not directly over the transmitter.
2. First half circle not smooth or round.
3. First half circle has galloping in pitch, roll or yaw.
4. First half circle changes altitude.
5. Turn 7. Same as 2 thru 4 for second full circle.
6. Model does not complete second full circle at same crossover point as finish of first half circle.
- 9 thru 11. Same as 2 thru 4 for third half circle.
12. Does not finish on same heading as entry.
13. Does not finish directly over transmitter.
14. Does not finish at same altitude as entry.
15. Does not fly straight and level to complete maneuver.

TOUCH AND GO: After a smooth and gradual descent on a straight line path into the wind, the model lands and slows down to taxi speed (approximately 1/4 the normal flight speed) but must not stop. Following this the model must accelerate and take off on the same heading as the entry. The maneuver may be downgraded for the following:

1. Approach during landing is too steep.
2. Gallops in pitch, yaw or roll during approach.
3. Model impacts or thuds onto ground due to lack of flare-out.
4. Model bounces on landing.
5. Model deviates left or right while rolling on ground.
6. Model fails to slow down to distinct taxi or "airborne" condition.
7. Model stops on ground.
8. Changes in heading during the take-off run.
9. "Jumping" from the ground.
10. Rebounding the ground after becoming airborne.
11. Too steep a climb angle.
12. Gallops in pitch, roll or yaw during climb.
13. Changes in heading during climb.
14. Drooping a wingtip.
15. Model is too far away to be seen clearly at any time during the maneuver.

THREE ROLLS: The model enters from a straight and level flight and rolls on its axis to the right or left until three complete rolls are performed. The recovery must be on the same heading and altitude as the entry. The consecutive roll maneuver should be downgraded for the following:

1. Model not level at the start of the rolls.
2. The path traced out by the model is not a straight line (i.e., the plane does barrel rolls or suffers changes in heading).
3. Roll rate not uniform throughout three rolls.
4. Pauses between rolls.
5. Sudden changes in heading between rolls.
6. The axis of the fuselage veers out at an angle to the flight path.
7. Plane changes altitude during rolls.
8. Plane does not do exactly three rolls.
9. Plane is not level at end of rolls.
10. Plane fails to do level flight at end of rolls.

IMMELMAN TURN: The model starts Immelman flying straight and level, pulls up into half loop followed by a half roll and finishes flying straight and level exactly 180° from the heading at entry. The Immelman may be downgraded because:

1. Model not level at start.
2. Model deviates left or right during half-loop.
3. Half-loop not completed exactly above point of commencement of half-loop.
4. Half roll does not commence immediately after half loop.
5. Plane deviates from a straight line during roll.
6. Model does not finish in level flight.
7. Model heading does not finish exactly opposite the direction of entry.

THREE INSIDE LOOPS: The model starts the maneuver flying straight and level, then pulls up into a smooth, round loop, followed by a second and third loop in exactly the same path with a straight and level recovery to finish. The maneuver may be downgraded because:

- A. During the first loop:
 1. Loop not round and smooth.
 2. Entry not level.
 3. Loop deviates left or right.
 4. Finish of loop not at same altitude as entry.
 5. Model pauses before start of second loop.
- B. During the second loop:
 1. Not on same heading as first loop.
 2. Not the same circular path as first loop.
 3. Loop deviates left or right.
 4. Finish of loop not at same altitude as entry.
 5. Model pauses before start of third loop.
- C. During the third loop:
 1. Not on same heading as first loop.
 2. Not on same circular path as first loop.
 3. Loop deviates left or right.
 4. Recovery not at same heading as entry.
 5. Recovery not at same altitude as entry.
 6. Recovery not level.

Note: Loops must appear rounded and superimposed to the ground-observer even in the presence of the wind.

Stall Turn

The model starts from straight and level flight and moves up to a vertical position, yaws through 180°, then dives along a parallel path and finishes the maneuver with the plane level at the same altitude as the entry. The Stall Turn may be downgraded because:

1. Model not level at start.
2. Does not become exactly vertical.
3. Turns left or right during pull-up.
4. Does not yaw tightly through 180°.
5. Return path more than two wing-spans from entry path.
6. Return path not parallel to entry path.
7. Maneuver not finished at same altitude as entry.
8. Plane not level at finish of maneuver.
9. Model does not fly straight and level to complete maneuver.

Three Turn Spin

The plane establishes a heading by flying straight and level, pulls up into a stall and commences the spin through one, two, three turns and recovers to level flight on the same heading as the initial flight direction. The judge must watch carefully to be sure this is a spin and not a vertical climb or a spiral dive. In the spin, some part of the plane always intersects an imaginary vertical line along the path of descent. In the spiral dive, the plane circles around, but outside of, the imaginary vertical line. The spin may be downgraded because:

1. Initial heading is not level.
2. Commencement of first spin is sloppy or uncertain.
3. Does not do exactly three turns. Less than

two or more than four turns should be scored zero.

4. Does not recover on same heading as initial heading.
5. If any of the three turns are spiral dives rather than spins, the score is zero.
6. Rate of rotation in spin is excessively rapid.
7. Does not finish level.
8. Does not fly straight and level for 50 feet.

FOUR POINT ROLL: From a straight and level upright flight path, the model is rolled 90 degrees and holds this attitude, with wings in a vertical position, long enough for it to be clearly defined. The model is then rolled another 90 degrees, in the same direction of rotation, and holds the inverted attitude long enough for it to be clearly defined. This is followed by another 90 degree roll in the same direction, bringing the ship to another knife edge position. Following a similar pause in the roll, the ship is finally rolled another 90 degrees to upright and level flight. The maneuver may be downgraded for the following reasons:

1. Model not level at start of roll.
2. The path traced by the model is not a straight line. (The plane does barrel roll segments or suffers changes in heading.)
3. Sudden corrections in heading between roll segments.
4. The axis of the fuselage veers out at too much of an angle to the flight path.
5. Plane changes attitude during roll.
6. Plane does not pause long enough between each segment of roll.
7. Wings are not exactly vertical at $\frac{1}{4}$ and $\frac{3}{4}$ positions.
8. Plane fails to do level flight at end of roll.

KNIFE EDGE FLIGHT: From straight and level flight path, model does a quarter roll (90 degrees) in either direction and holds this attitude for three full seconds. Model is then rolled back in the opposite direction to level upright flight. The maneuver may be downgraded for the following reasons:

1. Model not level at start of roll.
2. The path traced by the model is not a straight line.
3. The axis of the fuselage veers out too much of an angle to the flight path.
4. Knife edge attitude not held for at least 3 seconds.
5. Wings are not exactly vertical throughout the three seconds of knife edge flight.
6. Plane changes attitude or heading.
7. Recovery roll is in same direction as entry roll, zero point.
8. Plane fails to do level flight after recovery roll.

REVERSE SPIN: The plane establishes a heading by flying straight and level, pulls up into a stall and commences a spin in either direction. At the end of two complete turns the plane shall stop momentarily on the original heading and then execute a spin of two turns in the opposite direction from the first two. Final recovery shall be on the same heading as the beginning. Judge must watch carefully to make sure plane is not merely in a spiral dive or vertical roll. The maneuver may be downgraded for the following reasons:

1. Initial heading is not straight and level.
2. Commencement of first spin is sloppy or uncertain.
3. First spin is not exactly two turns. Less than $1\frac{1}{2}$ or more than $2\frac{1}{2}$ turns should be scored zero for whole maneuver.
4. Recovery from first spin is not on original heading.
5. Commencement of second spin is sloppy or uncertain.
6. Second spin not exactly two turns. Score zero as noted in item no. 3.
7. Recovery of second spin is not on original heading.
8. Rate of spin rotation during each half varies greatly or is too rapid.

9. Plane spiral dives or vertical rolls during maneuver. Zero score.

10. Plane fails to do straight and level flight at conclusion of maneuver.

FAI TOP HAT: Model starts in straight level flight pulls up into vertical climb and makes a half roll, then levels out inverted on the same heading as entry. After short inverted flight, model dives vertically, performs a half roll and finally recovers in straight level upright flight on same heading and height as entry. The Top Hat should be downgraded if:

1. Model does not start level.
2. Model does not go exactly vertical before starting roll.
3. Roll does not stop at exactly 180° from entry.
4. Model does not climb vertically for a brief period after completing roll.
5. Model does not go on an exactly horizontal inverted position after leveling out.
6. Model does not fly inverted for the same distance as the vertical climb and roll.
7. Model does not dive vertically briefly before starting half roll.
8. Second half roll not started at the same altitude as that where the first half roll was completed.
9. Second half roll not completed at same altitude as that where first roll started.
10. Model does not dive vertically for a brief period after completing second half roll.
11. Model deviates left or right of the entry path at any point in the maneuver.
12. Model does not recover at same altitude and heading as entry.

FAI ROLLING CIRCLE: Model commences in straight level flight, makes half a roll into inverted circular flight, subsequently making a half roll at each quadrant of the circle so that the model flies alternately upright and inverted in consecutive quadrants. The model recovers in straight level flight on the same heading and height as the entry. Downgrading shall result for any of the following reasons:

1. Plane not level at entry.
2. Half roll does not form an arc of a circle.
3. Model does not recover inverted at the 30° arc point.
4. Model heading is not at about 30° from entry at end of half roll.
5. Model does not fly a smooth circular inverted path from the instant it completes the half roll until reaching the 90° point.
6. Model does not roll upright at the same rate as previous half roll.
7. Model does not complete half roll in the same angular arc as used for the previous half roll.
8. Model heading is not at about 30° from that at entry of the half roll.
9. Model does not fly a smooth circular upright path from the instant it completes the half roll until reaching the 180° point.
10. All items from 1 to 9 apply to second half of the circle in the same way as the first half.
11. The path of the complete maneuver must not deviate from a circle.
12. Model must depart from the maneuver at the same point in space on the same heading and altitude as the entry.

FAI DOUBLE STALL TURN: The model starts in level flight, noses up to the vertical attitude, passes through 180 degrees, then dives and makes half of an outside loop into vertical flight, then yaws through 180 degrees again, finally recovering into upright level flight. Both yaws shall be to the right as seen from the pilot's and judge's point of view. The plane itself is actually yawing first to its right and then to its left. The maneuver shall be downgraded for the following reasons:

1. Model not level at start.
2. Does not become vertical.
3. Turns left or right during pull up.

4. Turn radius at top of stalls is larger than two wing spans.

5. Turns at top of stalls are less than 180°
6. Diving paths are not parallel to climbing paths.
7. Bottom of inverted portion is at different altitude than entry.
8. Turning point of second stall turn is at different altitude from the first turn.
9. Maneuver not finished at same altitude as entry.
10. Plane not level at finish of maneuver.

FAI HORIZONTAL EIGHT: The plane commences flying straight and level, pulls up into $\frac{1}{4}$ of an inside loop, does one full inverted loop starting from straight down, then $\frac{1}{4}$ of an inside loop finishing in straight and level flight. The Horizontal Eight may be downgraded because:

1. Entry not level.
2. First loop not round.
3. Plane deviates left or right during first loop.
4. Plane not vertical at start of second loop.
5. Second loop not the same diameter as first loop.
6. Second loop does not round.
7. Second loop deviates left or right.
8. Does not finish level.
9. Does not finish on same heading as entry.
10. Does not finish at same altitude as entry.

FAI VERTICAL EIGHT: The model commences the maneuver flying straight and level, pulls up into one complete inside loop, followed immediately by one outside loop, recovering on the same heading and at the same altitude as the entry. The maneuver shall be downgraded for the following reasons:

1. Entry not level.
2. First loop not round.
3. Plane deviates left or right during first loop.
4. First loop not completed at same heading and altitude as entry.
5. Second loop not round.
6. Second loop not same diameter as first.
7. Second loop not directly below first loop.
8. Plane deviates left or right during second loop.
9. Second loop not completed on same heading and at same altitude as the entry.
10. Plane fails to do straight and level flight at end of maneuver.

FAI DOUBLE IMMELMAN: Model commences in straight and level flight, pulls up into half an inside loop followed by a half roll to upright, flies straight and level for about one second, pushes down into half an outside loop followed by half a roll to upright, recovering in straight and level flight on the same heading and at the same altitude as the entry. Maneuver shall be downgraded for the following reasons:

1. Entry not straight and level.
2. First half loop not round.
3. Model deviates left or right during half loop.
4. Half loop not completed exactly above starting point.
5. Half roll does not start immediately after half loop.
6. Roll is not on a straight line and on 180 degree heading from entry.
7. Plane goes immediately into outside loop upon completion of half roll.
8. Plane holds straight flight too long before going to outside loop.
9. Half outside loop not round or same size as first half loop.
10. Model deviates left or right during half loop.
11. Half loop not completed exactly below starting point.
12. Final half roll does not start immediately after half outside loop.
13. Final half roll longer or shorter than first half roll.
14. Model does not finish on same heading

and at same altitude as entry.
15. Plane fails to do straight and level flight at end of maneuver.

THREE OUTSIDE LOOPS: The model commences the outside loop flying straight and level, then noses down into three outside loops and recovers flying straight and level on the same heading and altitude as the entry. The outside loops are downgraded in the same manner as the inside loops.

INVERTED THREE TURN SPIN: The plane establishes a heading by flying inverted straight and level, pushes up into a stall and commences the spin through three complete turns, then recovers to inverted level flight on the original heading. Judges must watch carefully to make sure plane is not in an inverted spiral dive or vertical roll. The maneuver may be downgraded for the following reasons:

1. Initial heading is not level.
2. Commencement of first spin is sloppy or uncertain.
3. Does not do exactly three turns. Less than $2\frac{1}{2}$ or more than $3\frac{1}{2}$ turns should be scored zero.
4. Does not recover on same heading as initial heading.
5. If any of the three turns are spiral dives rather than spins, the score is zero.
6. Rate of rotation in spin is excessively rapid.
7. Does not finish level, and inverted.
8. Does not fly straight and level at finish of maneuver.

SLOW ROLL: Model commences from straight and level flight and then rolls slowly at a uniform rate through one complete rotation. The approximate time of the roll to be five seconds. Note: No downgrade for slight overtime. Downgrading shall result for any of the following reasons:

1. Model not level at entry.
2. Plane deviates from a straight line during roll.
3. Roll rate not uniform.
4. Plane does not roll through exactly one revolution.
5. Plane changes attitude during roll.
6. Plane changes heading.
7. Roll rate is too rapid resulting in much less than five seconds elapsed during roll.
8. Plane is not level at finish of roll.
9. Plane fails to do level flight at end of maneuver.

TAIL SLIDE: The model commences with straight and level flight, pulls up to a vertical position, stops momentarily, slides downward tail first for two plane-lengths, recovers in a right-side-up position and finishes in straight and level flight at the same altitude as the entry. The maneuver may be downgraded as follows:

1. Entry not level.
2. Pull up not exactly vertical.
3. Does not fall tail first.
4. Yaws left or right.
5. Does not tail slide exactly two plane-lengths.
6. Falls into inverted position. Zero point.
7. Does not finish on same heading as entry.
8. Does not finish at same altitude as entry.
9. Plane fails to do level flight at end of maneuver.

REVERSE CUBAN EIGHT: Plane commences in straight and level flight, pulls up into a 45 degree climb, half roll to inverted and proceeds to inside loop until it is again climbing at a 45 degree angle. Plane then does another half roll to inverted that should cross the flight path of the first half roll, then again proceeds to inside loop until it has reached straight and level flight on the same heading and altitude as the beginning. Maneuver shall be downgraded for the following reasons:

1. Entry is not straight and level.
2. First roll not on 45 degree line.
3. Loop not round or deviates to left or right.
4. Second roll not on 45 degree line.
5. Middle of second roll does not cross middle point of first roll.

6. Second loop not round or deviates to left or right.
7. Second loop not at same altitude as first loop.
8. Second loop not same size as first loop.
9. Maneuver not completed at same altitude and on same heading as beginning.
10. Model fails to do level flight at end of maneuver.

COBRA ROLL: From upright, straight and level flight, the plane pulls up into a 45 degree climb, performs one complete roll at a moderate rate, continues the 45 degree climb for a moment, goes over the top in what amounts to one-fourth of an outside loop and heads down at a 45 degree angle. Another complete roll, equal in length and time to the first, is performed, and finally, the plane pulls out at the same altitude and heading as the beginning. The maneuver may be downgraded for the following reasons:

1. Entry is not straight and level.
2. Roll is not at 45 degree angle to ground.
3. Roll path traced out by model is not a straight line (i.e., plane barrel rolls or suffers change in heading) continuing in 45 degree climb.
4. No momentary straight flight between first roll and 1/2 outside loop or between 1/2 loop and second roll.
5. Flight path coming down is not at 45 degree angle to ground.
6. Second roll is not at same rate as first.
7. Roll path of second roll is not as described for first roll.
8. Pull out to level flight is not at same altitude and heading as entry.

FOUR LEAF CLOVER: The plane starts from straight and level flight and pulls up into an inside loop. As it reaches the 3/4 point, headed straight down, the plane is rolled 90 degrees to the right and continues into another loop of the same size and altitude as the first. Again when it reaches the straight down position, the plane is rotated another 90 degrees to the right and continues in a third loop of the same size and altitude. The same procedure is repeated for the fourth loop, and at the straight down point, the plane is rotated 90 degrees and pulls out into straight and level flight, actually completing the last quarter of the first loop. The plane finishes the maneuver in exactly the same path as it started. The four loops are 90 degrees apart and all meet, at the 3/4 point, in space. The maneuver may be downgraded for the following reasons:

1. Entry is not straight and level.
2. Loops are not smooth and round.
3. Plane is not in same position in space at 3/4 point of each loop.
4. Plane deviates left or right during each loop.
5. Tops and bottoms of all loops are not at same altitude.
6. All loops are not same size.
7. Loops are not 90 degrees apart.
8. Final pull out is not in path of first loop.
9. Recovery into level flight is not at same altitude and heading as entry.

LOOP WITH 1 1/2 SNAP: The plane starts in straight and level flight and pulls up into an inside loop. While in the loop, as it approaches the top, the plane does a one and a half snap roll and completes the remainder of the loop path as an outside maneuver. At the point of completion of the loop, the plane is half rolled to straight and level upright flight. The maneuver shall be downgraded for the following reasons:

1. Model not straight and level at start.
2. First part of loop (inside) is not round or deviates left or right.
3. One and a half roll is not recognized as a snap maneuver, but is merely a quick roll. Zero points. Judges must watch carefully to see that plane actually stalls out

- and does not just do a barrel or axial roll.
4. Recovery from snap is not to level flight on same heading.
5. Second half of loop (outside) is not round or deviates left or right.
6. Downgrade half roll to upright in accordance with requirements for Three Rolls maneuver.
7. Plane fails to do level flight at end of maneuver.

INVERTED REVERSE CUBAN EIGHT: The plane enters this maneuver in straight and level flight, pulls up into a 45 degree climb, half rolls to upright, and proceeds to outside loop until it is again climbing at a 45 degree angle. The plane then performs another half roll to the first roll, then again proceeds to outside loop until it has reached straight and level inverted flight on the same heading and at the same altitude as the beginning. The maneuver may be downgraded for the following reasons:

1. Entry (inverted) is not straight and level.
2. First roll not on 45 degree line.
3. First loop not round or deviates to left or right.
4. Second roll not on 45 degree line.
5. Middle of second roll does not cross middle point of first roll.
6. Second loop not round or deviates to left or right.
7. Second loop not at same altitude.
8. Maneuver not completed at same altitude and on same heading as entry.
10. Plane fails to do straight and level flight at conclusion of maneuver.

180 DEGREE TURN: The plane starts in straight and level flight, pulls up into a vertical climb, rolls 90 degrees, performs half of an outside loop, rolls 90 degrees in the opposite direction to the first quarter roll, and pulls out at the same altitude but with a 180 degree heading change. The maneuver may be downgraded for the following reasons:

1. Entry is not straight and level.
2. Pull up is not to exact vertical climb.
3. Roll is more or less than 90 degrees.
4. Path of roll is not straight vertical line.
5. Half outside loop deviates left or right.
6. Half loop is not smooth and round.
7. Second 90 degree roll path is not straight vertical line.
8. Pull out to level flight is sudden or jerky.
9. Pull out is not to same altitude and 180 degrees opposite heading to entry.
10. Plane fails to perform straight and level flight at end of maneuver.

LOOP WITH ROLLS: The plane starts in level flight and pulls up into one loop. While looping, the plane also performs two complete rolls, one in each half of the loop. For maximum score, the plane must complete each roll in not less than 120 degrees of each half of the loop. The maneuver may be downgraded for the following reasons:

1. Entry is not from straight and level flight path.
2. Loop path is not smooth and round.
3. Path traced by rolling maneuvers is not part of loop.
4. Rolls are not at moderate and continuous rate.
5. Rolls are not centered in each half of loop.
6. Rolls do not use at least 120 degrees of each half of loop.
7. Loop path deviates to left or right.
8. Finish of loop is not at same altitude and heading as entry.
9. Plane fails to fly straight and level at end of maneuver.

TRAFFIC PATTERN APPROACH: The rectangular approach is commenced with the model flying into the wind above the transmitter, turn of 90°, a cross-wind leg, a second turn of 90°, a down-wind leg, a third turn of 90°, a cross-wind leg, a fourth turn of 90° and straight flight toward the point of touchdown. The maneuver is finished just prior to the point of touchdown (Six foot altitude).

Note: The contest director will announce whether the turns should be left or right. The rectangular approach may be downgraded because:

1. Legs of rectangle are not straight and perpendicular to each other.
2. The 90° turns are not smooth, precise, or sharp.
3. Gallops in pitch, yaw or roll during the approach.
4. Attempts to break out of pattern to go around again. Zero points!
5. Model climbs during approach.

LANDING PERFECTION: At the conclusion of the final approach leg, the model continues to descend at a gradual rate and lands on the heading used in the final approach leg. After landing, the model must roll in a straight line and come to a complete stop. The landing should be downgraded if:

1. Approach during landing is too steep.
2. Gallops in pitch, yaw or roll during approach.
3. Model impacts or thuds onto ground due to lack of flare-out.
4. Model bounces on landing.
5. Model turns left or right while rolling to a stop. Turns necessary to avoid running off the runway

23. RADIO CONTROL PYLON RACING—FORMULA I AND II

23.1 OBJECTIVE: To run multiple plane races that will recapture the spirit and thrills of the great air races of the past and present, and that will be interesting for spectators as well as challenging for the contestants.

23.2 GENERAL: All AMA and FCC regulations covering the R/C flyer, his plane and equipment, shall be applicable to this event, except as noted herein. There shall be no limitation on the type of equipment fitted to the plane, or the number of controls. The contestant shall be allowed two entries in this event. He can only use his alternate model if the first model is not flyable. The contestant may have someone else fly his model in competition if he desires to do so; however, if this is done they shall be entered as a team. Both the owner and the pilot shall have current AMA sporting licenses.

Consideration of safety for spectators, contest personnel, and other contestants are of the utmost importance in this event. Any unsportsmanlike conduct or hazardous flying over a controlled spectator area will be cause for immediate disqualification of that flight.

23.3 MODEL AIRCRAFT REQUIREMENTS:

Formula I: Models must be a replica of the 130 cubic inch class of full size Formula I racing aircraft.

Formula II: Original prototypes, or models resembling known full scale aircraft that have raced or were designed for racing on a closed course. For the latter, contestant must provide event officials with proof of the plane's identity and its connection with racing.

23.4 MODEL AIRCRAFT SPECIFICATIONS:

23.4.1 ENGINE(S): Maximum total nominal displacement shall be .40 cubic inches. Engines must be production units assembled from factory available production parts. Engines and parts must have been produced in quantities greater than 100, and all must be available through normal retail outlets in the

may be excused if wind direction and spot location are adverse. However this leniency applies only if the model lands in the spot and should not be employed in cases where the flyer accidentally lands near the edge of the runway outside the spot.

6. Landing is dead stick.
7. Model fails to make pronounced stop.
8. Models rolls too far away to accurately judge.
9. Model pitches over and makes ground contact with nose or wingtip.
10. If model flips over on its back or cartwheels on wings—0 points.

SPOT LANDING: Landing within the 100 foot circle results in automatic awarding of the same number of points obtained in landing perfection. All judges should show agreement on their score sheets (Not on the amount of score, just whether or not a spot landing was accomplished) and in the event of disagreement, a majority vote by the judges should dictate.

CONCLUSION OF FLIGHT: The official flight is finished at the moment the plane stops at the end of its landing roll. At this point the contestant announces "flight complete" and immediately taxis his plane off the runway to whatever area the Contest Director designates. If landing was deadstick, pilot or helper shall retrieve plane as soon as permitted by official in charge of flight line.

U.S.A. Alterations shall be limited to catalog listed parts produced in quantities greater than 100 units and available commercially to anyone from the manufacturer of the engine being altered.

23.4.2 CARBURETOR: Engines shall be equipped with working radio controlled throttles of single barrel type from factory available production parts, not necessarily from same manufacturer as the engine. Throttles must be able to reduce engine RPM sufficiently to permit the aircraft to be landed if and when required.

23.4.3 PROPELLER: Only wooden, fixed pitch, two blade propellers shall be permitted.

23.4.4 SPINNER:

23.4.4.1 A rounded spinner of at least 2 inches diameter is required on all Formula I aircraft and on prototype Formula II aircraft.

23.4.4.2 Formula II models of real aircraft need not use a 2 inch spinner where such a spinner is inappropriate, but must at least meet the AMA prop nut rule.

23.4.5 FUSELAGE:

Formula I: At the pilot's cockpit, a minimum depth of 7 inches and a minimum width of 3 1/2 inches is required.


Formula II: A minimum depth of 7 inches and a minimum width of 3 1/2 inches is required. Both minimum dimensions must occur at the same cross section location.

23.4.5.1 Formula II prototype aircraft must have cheek cowl and the cross section at the engine shall be an oval at least 5 inches wide and 2 inches high overall.

23.4.5.2 For both Formula I and II the engine shall be cowed at least to the extent that no more than the cylinder and head fins project beyond the fuselage outline. The exhaust side of cowl may be shaped to clear exhaust exit.

23.4.6 LANDING GEAR: At least two wheels,

269

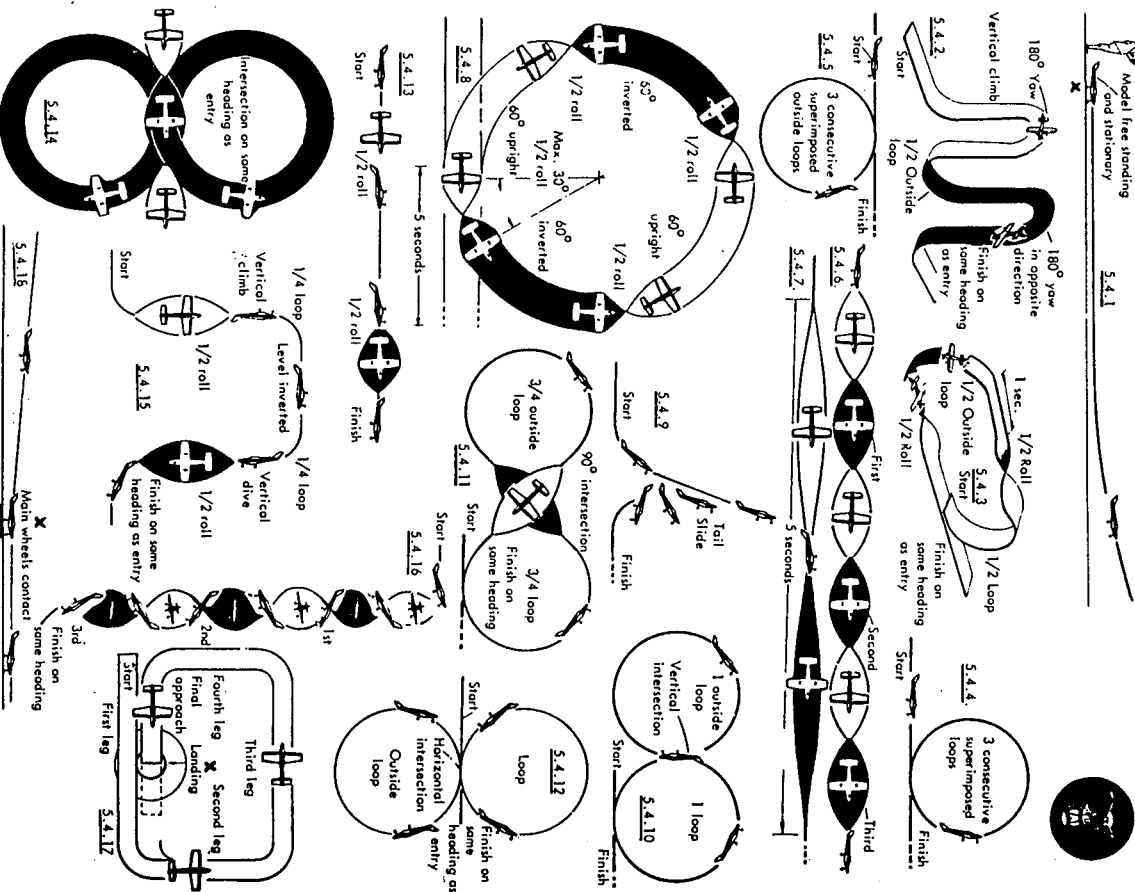

269

NOTE: Loops must appear round and superimposed to the ground observer even in the presence of the wind.

5.4.5. INVERTED LOOPS: The model commences the inverted loop flying straight and level, then noses down into three inverted loops and recovers flying straight and level on the same heading and altitude as the entry.

 $k = 15$ $\mathbf{k} = \mathbf{10}$

5.4.7. SLOW ROLL: The model commences from straight and level flight, and then rolls slowly at a uniform rate through one complete rotation. The approximate time of the roll to be 5 seconds.

 $\kappa = 15$ 天
目
山 $k = 15$

$k = 15$

$$K=10$$
$$K = 3$$

天二五

$$K = 3$$

K = 10

$$\infty$$
$$K = 15$$

K = 15

-
-
-
-

•

Compet-

Note: The judge must watch carefully to be

天
二
八

天
一
五
$$K^* = 10$$

1

where loading is 50m from

circle

ATION OF AN OFFICIAL. FLIGHT

Cost measures were

MINIATURE JET PROPULSION ENGINES

Model Power for Aircraft, Helicopters, Racing Cars, Speed Boats,

SCORPION \$400. For contest model jets. Engine thrust 4 ozs. Duration 1.9 secs. Wgt. 1.9/16 ozs. Lgt. 2 1/4". Dia. 1 1/4".

PLY-LOADER 150 \$2.00. Engine thrust 1 1/2 ozs. Duration 7 secs. Wgt. 15/16 oz. Lgt. 3 1/16". Dia. 7/16".

ROCKET HT 50 \$1.50. For space ships and missiles. Engine thrust 3 1/2 ozs. Duration 1.3 secs. Wgt. 4 ozs. Duration 4.5 secs. Wgt. 7/8 oz. Lgt. 1 3/4". Dia. 7/8".

50 HELI-CAT \$1.00. Engine thrust 1 1/2 ozs. Duration 1.3 secs. Wgt. 5/16 oz. Lgt. 1 1/4". Dia. 7/8".

TO INCREASE ENGINE THUST:

No. 50 @ 70¢
No. 150-500 @ \$1.50.

JETAEX FUEL PELLETS

50.10 @ 60¢, 30.20 @ \$1.00, 50.20 HT @ \$1.50, 150 @ \$1.00, 150.20 @ \$1.50, 600.10 @ \$2.00

JETAEX ENGINES BOOK \$1.00
50 PAGES • FULLY ILLUSTRATED

ARISTO-CRAFT DISTINCTIVE MINIATURES • 314 FIFTH AVE. (TAMM) NEW YORK, N.Y. • 10005

UNBEATABLE! FOR VARIETY! QUALITY! UNIQUENESS!

GIANT-SIZE SCALE MODEL U-CONTROL GAS KITS \$21.50
Historic Models! Prefabbed! Everything needed for quick assembly. Full size plans. Same models and sizes available for R/C \$29.95 — .35-49 engines. All prices less engine.

CURTISS HAWK F1C
W.S. .48" • ENG. 19-35

BOEING PT17
W.S. .48" • ENG. 19-35

BEECHCRAFT
W.S. .40" • ENG. 19-35

GRUMMAN F4F model
W.S. .48" • ENG. 19-35

FAMOUS PLANES KITS DESIGNED FOR R/C

Contain selected balsa and hardwood parts, glue, and hardware. Plans, balsa, glue, aluminum or fiber glass covering and wheel parts supplied where required. Complete hardware (less wheels and R/C fittings) and full size plans included.

SES WWI FIGHTER \$54.95
WINGSpan 54", 49 to 61. ENGINES

FA200 AERO SUBARU \$54.95
WINGSpan 54", 49 to 61. ENGINES

CHIMPION Single Wing \$54.95
WINGSpan 62", 49 to 61. ENGINES

"PIONEER" \$54.95
WINGSpan 54", 49 to 61. ENGINES

RADIO-CONTROL PLANE 60" W.S./A.I.T.F. \$100.00
Railway Express Collect

SPRING WOUND MOTOR CONTROLS
LIGHTWEIGHT CONTRACT 3-SPEEDS \$5.50
2-SPEEDS \$5.00

SPEED BOAT KITS DESIGNED FOR R/C

Complete with plated fittings. Kits contain seasoned hardwood, pre-fabricated for accurate, fast assembly. Decks are aircraft grade plywood with hatches and other openings, ready cut out. Convertible cabin changes model from cabin cruiser to run about. All necessary fittings (except R/C related parts) shaft, stuffing box, engine mounting, fly wheel, fuel tank with tubing, screws, nuts, bolts, instructions, etc. Special "Deep-V" hull design for high speed in straight away and extra stability and control in tight turns. Engine powered or by battery operated electric motors.

"TARPOON" for 60 engine \$67.95
37 1/2" long, 14 1/2" wide, 7 1/2" high

"TUGBOAT" for 60 engine \$67.95
37 1/2" long, 14 1/2" wide, 7 1/2" high

"TUGBOAT" for 60 engine \$67.95
37 1/2" long, 14 1/2" wide, 7 1/2" high

"TUGBOAT" for 60 engine \$67.95
37 1/2" long, 14 1/2" wide, 7 1/2" high

"TUGBOAT" for 60 engine \$67.95
37 1/2" long, 14 1/2" wide, 7 1/2" high

ARISTO-MATIC MARK II BOAT ACTUATOR \$13.95

Self-contained low drain channel receiver. Two channel operation from low cost single-channel receivers. Features: Electrical Switching Action—forward, stop, reverse, stop. Mechanical Directional Control—left, neutral, right, neutral. Operates on 3-6 volts.

THE NEW KAVAN CUSTOM R/C CARBURETOR \$9.95

Designed to maintain proper fuel-air mixture at all throttle settings. Provides automatic control for both fuel and air entering the engine, resulting in increased power, improved response and optimum fuel mixture at all RPM. Does not go rich and lean. One setting for all power levels. You get dependable idling without stalling.

AVAILABLE FOR THESE ENGINES

O.S. Max 19, 30, 40, 50, 58, 60 / Micro 35, 49, 61 / Super 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230, 240, 250, 260, 270, 280, 290, 300, 310, 320, 330, 340, 350, 360, 370, 380, 390, 400, 410, 420, 430, 440, 450, 4